



# ADMIRAL

---

All exposed T suspended ceiling applications, offices, schools and hospitals.

# ADMIRAL




## PRODUCT BENEFITS

- Specular Miro 4 Double Parabolic Louvre
- 88% Light Output Efficiency
- 0,6mm Mild Steel Construction
- Powder Coated White between 80 to 120 Micron
- OSRAM 100,000 Hour ECG
- SABS approved control gear
- SABS safety mark
- Low maintenance.

## PRODUCT FEATURES

- Available in standard warm start electronic control gear, DALI or DSI Dimmable Gear
- For Emergency Battery Back Up add "E" to end of the catalogue reference
- 5 Year Guarantee

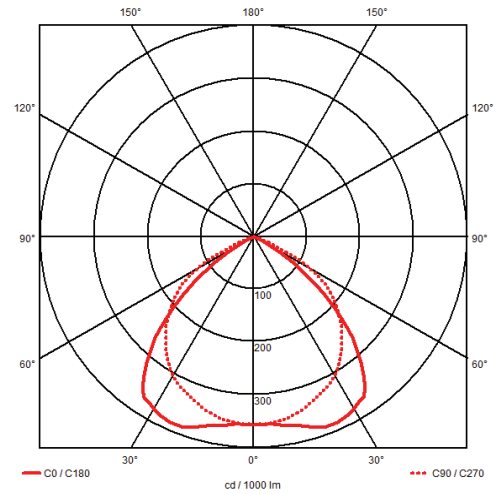

Reference Code	Lamp Format	Length Format (mm)	Dimensions		
			L (mm)	B (mm)	H (mm)
RAD-214-902	2x14w T5	600x300	595	295	55
RAD-214-002	2x14w T5	600x600	595	595	55
RAD-314-002	3x14w T5	600x600	595	595	55
RAD-414-002	4x14w T5	600x600	595	595	55
RAD-224-902	2x24w T5	600x300	595	295	55
RAD-224-002	2x24w T5	600x600	595	595	55
RAD-324-002	3x24w T5	600x600	595	595	55
RAD-424-002	4x24w T5	600x600	595	595	55
RAD-228-902	2x28w T5	1200x300	1195	295	55
RAD-228-002	2x28w T5	1200x600	1195	595	55
RAD-328-002	3x28w T5	1200x600	1195	595	55
RAD-428-002	4x28w T5	1200x600	1195	595	55
RAD-254-902	2x54w T5	1200x300	1195	295	55
RAD-254-002	2x54w T5	1200x600	1195	595	55
RAD-354-002	3x54w T5	1200x600	1195	595	55
RAD-454-002	4x54w T5	1200x600	1195	595	55

