



## REMO

---

All surface applications, Offices, Schools,  
Hospitals.

# REMO




## PRODUCT BENEFITS

- Specular Miro 4 Double Parabolic Louvre
- 88% Light Output Efficiency
- 0,6mm Mild Steel Construction
- Powder Coated White between 80 to 120 Micron
- OSRAM 100,000 Hour ECG
- SABS approved control gear
- SABS safety mark
- Low maintenance

## PRODUCT FEATURES

- Available in standard warm start electronic control gear, DALI or DSI Dimmable Gear
- For Emergency Battery Back Up add "E" to end of the catalogue reference
- 5 Year Guarantee

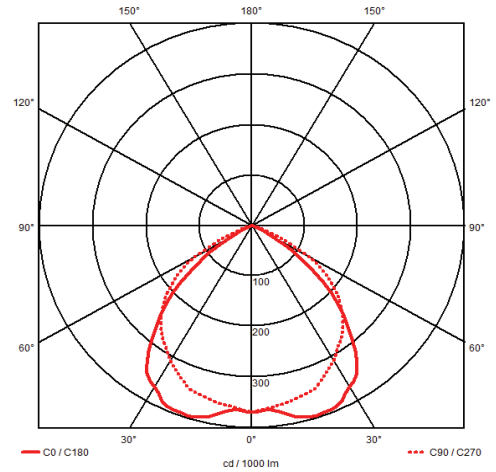

Reference Code	Lamp Format	Length Format (mm)	Dimensions		
			L (mm)	B (mm)	H (mm)
SAD-114-002	1x14w T5	600	600	135	55
SAD-214-002	2x14w T5	600	600	225	55
SAD-314-002	3x14w T5	600	600	315	55
SAD-124-002	1x24w T5	600	600	135	55
SAD-224-002	2x24w T5	600	600	225	55
SAD-324-002	3x24w T5	600	600	315	55
SAD-128-002	1x28w T5	1200	1200	135	55
SAD-228-002	2x28w T5	1200	1200	225	55
SAD-328-002	3x28w T5	1200	1200	315	55
SAD-154-002	1x54w T5	1200	1200	135	55
SAD-254-002	2x54w T5	1200	1200	225	55
SAD-354-002	3x54w T5	1200	1200	315	55
SAD-135-002	1x35w T5	1500	1500	135	55
SAD-235-002	2x35w T5	1500	1500	225	55
SAD-335-002	3x35w T5	1500	1500	315	55
SAD-149-002	1x49w T5	1500	1500	135	55
SAD-249-002	2x49w T5	1500	1500	225	55
SAD-349-002	3x49w T5	1500	1500	315	55
SAD-180-002	1x80w T5	1500	1500	135	55
SAD-280-002	2x80w T5	1500	1500	225	55

