



VIVARO

All exposed T suspended ceiling applications, offices, schools and hospitals.

VIVARO




PRODUCT BENEFITS

- Miro 4 Specular Double Parabolic Louvre
- Direct Indirect Reflector
- 84% Light Output Efficacy
- 0,6mm Mild Steel Construction
- Powder Coated White between 80 to 120 Micron
- OSRAM 100,000 Hour ECG
- SABS approved control gear
- SABS safety mark
- Low maintenance.

PRODUCT FEATURES

- Available in standard warm start electronic control gear, DALI or DSI Dimmable Gear
- For Emergency Battery Back Up add "E" to end of the catalogue reference
- 5 Year Guarantee

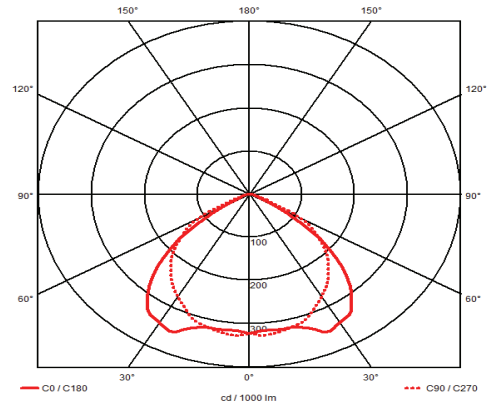

Reference Code	Lamp Format	Length Format (mm)	Dimensions		
			L (mm)	B (mm)	H (mm)
RVI-214-002	2x14w T5	600x600	595	595	70
RVI-224-002	2X24w T5	600x600	595	595	70
RVI-228-002	2x28w T5	1200x600	1195	595	70
RVI-254-002	2x54w T5	1200x600	1195	595	70

