

RECESSED LIGHTING

Introducing the **ADMIRAL LED**



The **ADMIRAL LED** is a decorative, stylish recessed LED luminaire with clean lines and low glare specular aluminium louvre. Ideal for offices, conference facilities, schools and shopping malls.

**LIGHTING
INNOVATIONS
AFRICA**

A member of the Fagerhult Group

Connecting Light.
Creating **Life.**



ADMIRAL LED



Product Benefits



- Attractive and efficient
- Modern sleek design
- Good glare control – UGR < 19
- Low maintenance
- Integral LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark



Product Features

- Highly efficient super-purity matt aluminium louvres with LED hiding diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, LI-Connect Bluetooth mesh control, tuneable white, emergency and sensor including Organic Response sensor
- Long life
- Available in 2 or 3 cell louvres and 600x600 or 1200x600 ceiling format
- LED life $L_{80}B_{10}$ – 50 000 hours
- Driver life F_{10} – 50 000 hours
- Supply – 220–240V 50–60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

 **118 lm/W**

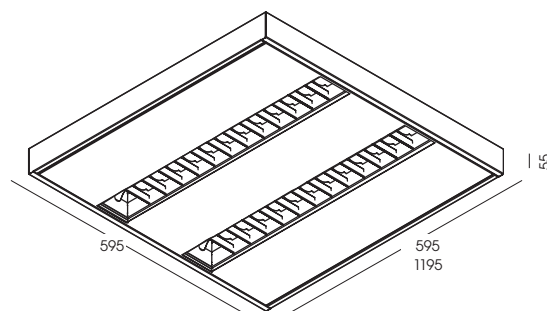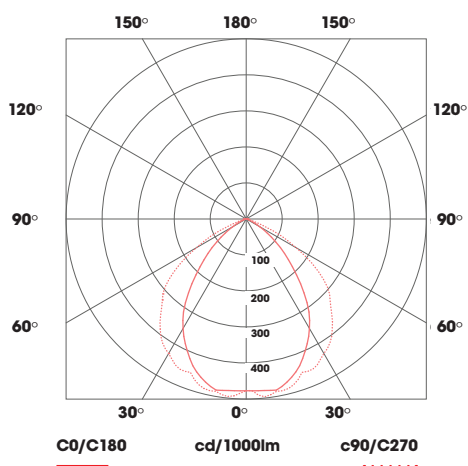

Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600 x 600 2-Cell					
32W	3 660	4000K	114	>80	RLD-32W-2C6
39W	4 350	4000K	113	>80	RLD-39W-2C6
1200 x 600 2-Cell					
50W	5 880	4000K	118	>80	RLD-50W-2C12
61W	7 060	4000K	116	>80	RLD-61W-2C12
600 x 600 3-Cell					
38W	4 410	4000K	118	>80	RLD-38W-3C6
48W	5 500	4000K	115	>80	RLD-48W-3C6
1200 x 600 3-Cell					
75W	8 820	4000K	118	>80	RLD-75W-3C12
92W	10 590	4000K	116	>80	RLD-92W-3C12