

RECESSED LIGHTING



Introducing the **SWIFT**



The **SWIFT** is a semi-direct recessed luminaire with a formed opal diffuser. Ideal for offices, conference facilities, schools and shopping malls.

LIGHTING
INNOVATIONS
AFRICA

A member of the Fagerhult Group

Connecting Light.
Creating **Life.**





Product Benefits



- Attractive and efficient
- Modern sleek design
- Low maintenance
- Integral LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark



Product Features

- Highly efficient back-lit formed opal diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, Li-Connect Bluetooth mesh control, tuneable white and emergency
- Long life
- Available in 600x600 or 1200x600 ceiling format
- LED life $L_{80}B_{10}$ – 50 000 hours
- Driver life F_{10} – 50 000 hours
- Supply – 220–240V 50–60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

133 lm/W

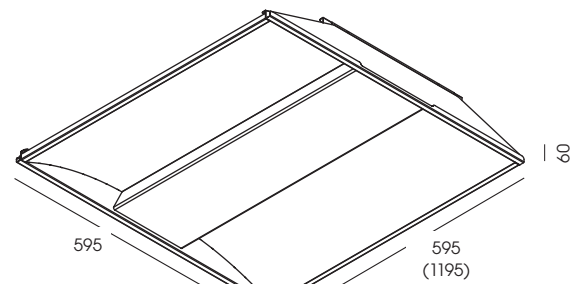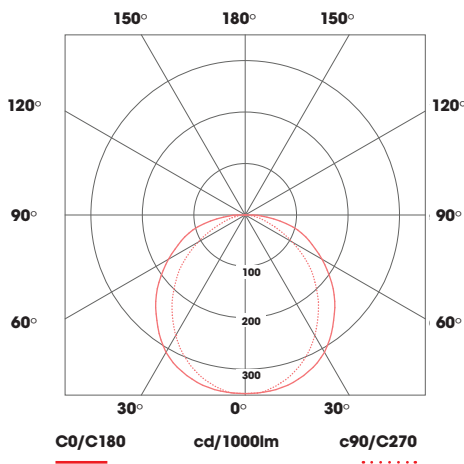

Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600 x 600					
27W	3 550	4000K	131	>80	RLS-27W-2R6
32W	4 050	4000K	127	>80	RLS-32W-2R6
1200 x 600					
39W	5 200	4000K	133	>80	RLS-39W-2R12
54W	7 000	4000K	130	>80	RLS-54W-2R12