

BATTEN LIGHTING



Introducing the **AZTEK NARROW**



The **AZTEK NARROW** is an efficient solution for surface/trunking mount applications such as parking garages, stores, stairways and walkways.

**LIGHTING
INNOVATIONS
AFRICA**

A member of the Fagerhult Group

Connecting Light.
Creating **Life.**



AZTEK NARROW



Product Benefits



- Attractive and efficient
- Low energy consumption
- Modern sleek design
- Low maintenance
- Built-in LED driver
- Easy installation
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark

Product Features

- Attractive wide angle diffuser
- Variable output possible by setting different drive currents
- Options include emergency, DALI dimmable, LI-Connect Bluetooth mesh control and additional surge protection
- Long life
- LED life $L_{80}B_{10}$ - 50 000 hours
- Driver life F_{10} - 100 000 hours
- Supply = 220-240V 50-60Hz PF>0.95
- Surge current (flicker) < 5%
- 5 year guarantee



 **138 lm/W**

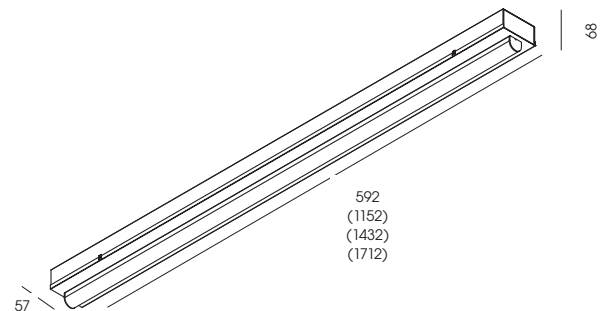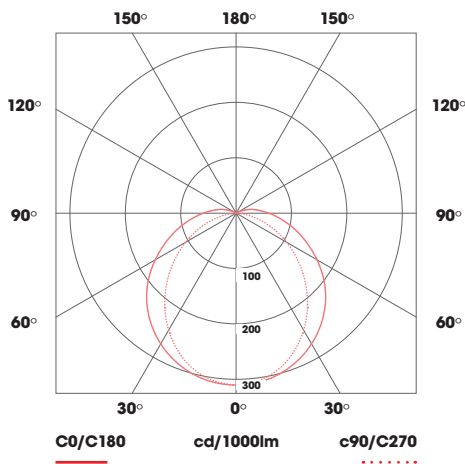

Efficacy Rating

 **PREMIUM RANGE** >140 lm/W

 **MID RANGE** 120 - 140 lm/W

 **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
592mm module					
10W (250mA)	1 380	4000K	138	>80	SZnC-10W-1R6
19W (500mA)	2 350	4000K	123	>80	SZnC-19W-1R6
1152mm module					
19W (250mA)	2 620	4000K	138	>80	SZnC-19W-1R12
39W (525mA)	4 760	4000K	122	>80	SZnC-39W-1R12
1432mm module					
24W (250mA)	3 310	4000K	138	>80	SZnC-24W-1R15
55W (550mA)	6 660	4000K	121	>80	SZnC-55W-1R15
1712mm module					
30W (250mA)	4 050	4000K	135	>80	SZnC-30W-1R17
66W (550mA)	7 990	4000K	121	>80	SZnC-66W-1R17