

LINEAR LIGHTING

Introducing the **CIRCO 35**



The **CIRCO 35** is a circular surface or suspended narrow extruded aluminium profile with the option of downlight only or up/down light. Suitable for a wide range of decorative applications including shopping malls, walkways, reception areas and decorative lighting.

**LIGHTING
INNOVATIONS
AFRICA**

A member of the Fagerhult Group

Connecting Light.
Creating **Life**.



CIRCO 35






Product Benefits

- Attractive and efficient
- Ease of installation and maintenance
- SANS-IEC 60598 safety compliance and mark

Product Features

- Extruded aluminium profile – natural anodised finish with powder coated colour options
- Polycarbonate opal diffuser
- Available in diameter 1500mm and 3000mm options
- Remote LED driver
- Available in CCT 3000K and 4000K
- Options include DALI dimming, emergency and Li-Connect Bluetooth mesh control
- LED life $L_{70}B_{50}$ – 50 000 hours
- Driver life F_{10} – 50 000 hours
- Supply – 220–240V 50–60Hz PF > 0.95
- Ripple current (flicker) < 5%
- 5 year guarantee

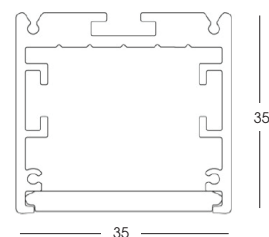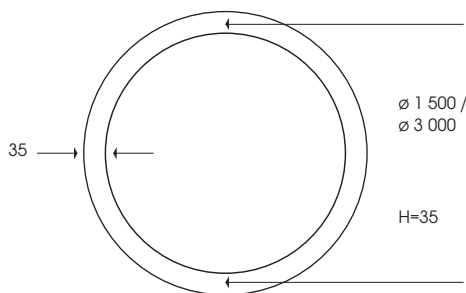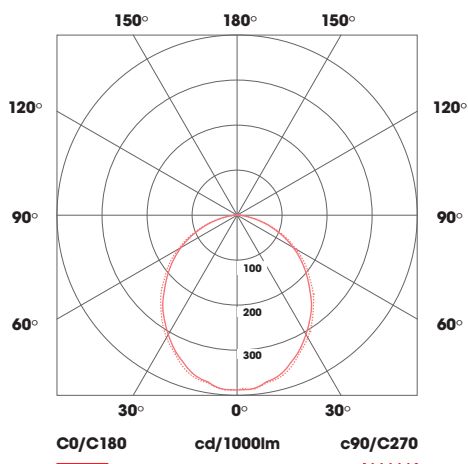

Luminaire Wattage per metre	Luminaire Output (Lumens) per metre	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
Diameter 1500mm					
104W	4 160	4000K	40	>80	CIRCO35-104W-15A
Diameter 3000mm					
208W	8 320	4000K	40	>80	CIRCO35-208W-30A