

PENDANT LIGHTING



Introducing the TRI-AXE PENDANT



The **TRI-AXE PENDANT** is a triangular shaped luminaire with a back-lit opal panel for the illumination of reception, pause and other similar areas in office buildings.

**LIGHTING
INNOVATIONS
AFRICA**

A member of the Fagerhult Group

Connecting Light.
Creating **Life.**



TRI-AXE



Product Benefits



- Attractive and efficient
- Low maintenance
- Integral LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark



Product Features

- Variable light output possible by adjusting LED drive current
- Options include DALI dimming and LI-Connect Bluetooth mesh control
- LED life $L_{80}B_{10}$ - 50 000 hours
- Driver life F_{10} - 50 000 hours
- Supply = 220-240V 50-60Hz PF>0.95
- Ripple current (flicker) < 5%
- 5 year guarantee

 **110 lm/W**

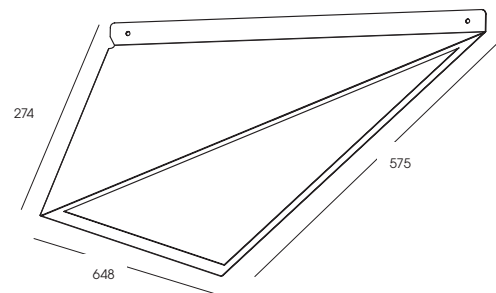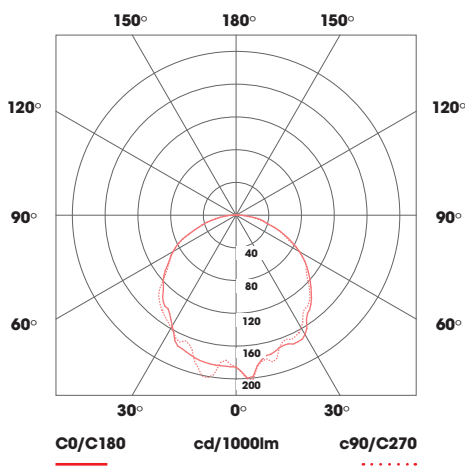

Efficacy Rating

 **PREMIUM RANGE** >140 lm/W

 **MID RANGE** 120 - 140 lm/W

 **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
24W (325mA)	2 850	4000K	119	>85	TPL-24W
30W (400mA)	3 460	4000K	115	>85	TPL-30W
40W (525mA)	4 400	4000K	110	>85	TPL-40W